



01



02



03




04




05



06

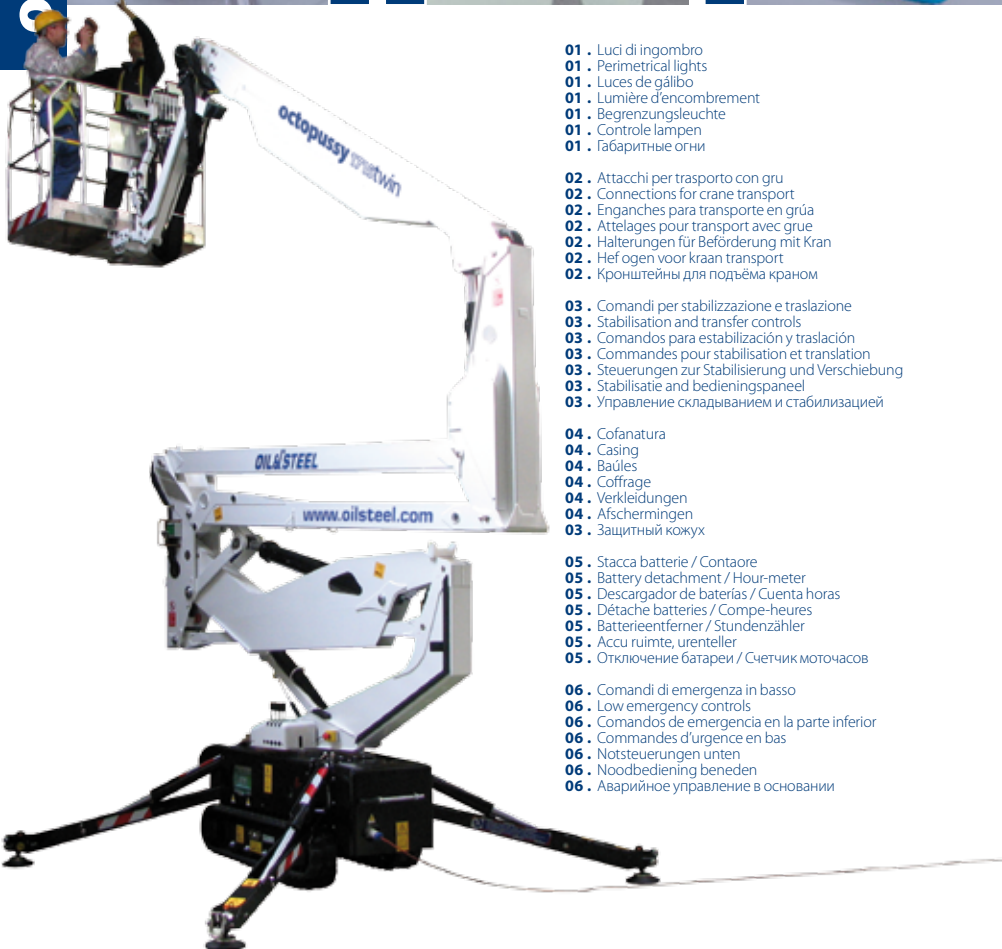



- 01 . Luci di ingombro
- 01 . Perimetrical lights
- 01 . Luces de galibo
- 01 . Lumière d'encombrement
- 01 . Begrenzungsleuchte
- 01 . Controle lampen
- 01 . Габаритные огни
  
- 02 . Attacchi per trasporto con gru
- 02 . Connections for crane transport
- 02 . Enganches para transporte en grúa
- 02 . Attelages pour transport avec grue
- 02 . Halterungen für Beförderung mit Kran
- 02 . Hef ogen voor kraan transport
- 02 . Кронштейны для подъёма краном
  
- 03 . Comandi per stabilizzazione e traslazione
- 03 . Stabilisation and transfer controls
- 03 . Comandos para estabilización y traslación
- 03 . Commandes pour stabilisation et translation
- 03 . Steuerungen zur Stabilisierung und Verschiebung
- 03 . Stabilisatie and bedieningspaneel
- 03 . Управление складыванием и стабилизацией
  
- 04 . Cofanatura
- 04 . Casing
- 04 . Baúles
- 04 . Coffrage
- 04 . Verkleidungen
- 04 . Afschermingen
- 03 . Защитный кожух
  
- 05 . Stacca batterie / Contaore
- 05 . Battery detachment / Hour-meter
- 05 . Descargador de baterías / Cuenta horas
- 05 . Détache batteries / Compe-heures
- 05 . Batterieentferner / Stundenzähler
- 05 . Accu ruimte, urenteller
- 05 . Отключение батареи / Счетчик моточасов
  
- 06 . Comandi di emergenza in basso
- 06 . Low emergency controls
- 06 . Comandos de emergencia en la parte inferior
- 06 . Commandes d'urgence en bas
- 06 . Notsteuerungen unten
- 06 . Noodbediening beneden
- 06 . Аварийное управление в основании

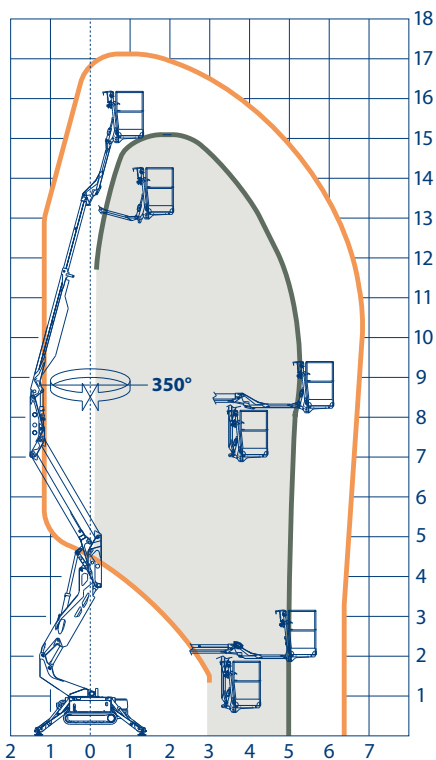

120 kg



200 kg

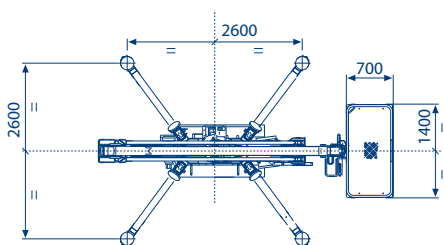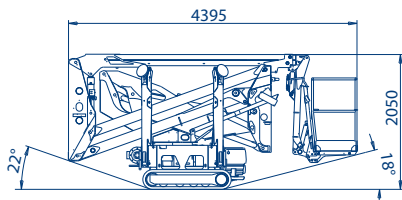

octopussy 1715 twin

	17 m / 120 kg 15,2 m / 200 kg		4395 mm		
	15 m / 120 kg 13,2 m / 200 kg		780 mm		
	6,8 m / 120 kg 5,2 m / 200 kg		ribaltabili a discesa idraulica lowerable hydraulic descent repegables de bajada hidraulica escamotables à descente hydraulique kappbar mit hydraulischen senken hydraulisch uitvouwbare stempelpoten гидравлическое опускание		
	350°		honda monocilindrico silenzioso/elettrico 220 V single-cylinder noiseless honda/220V electric honda monocilindrico silenciado/electrico 220V honda monocylindrique avec silencieux/electrique 220V geräuschloser einzylindermotor, honda 220V 1 cylinder - geluidsarm honda/electrische 220V одноцилиндровый безшумный honda / электрический 220В		
	1400x700x h1100 mm 1400x700x h1100 mm 1400x700x h1100 mm 1400x700x h1100 mm 1400x700x h1100 mm 1400x700x h1100 mm	alluminio aluminium aluminio alu aluminium алюминиевая	asportabile removable desmontable démontable abnehmbar afneembaar съёмная		cingolata 1,5 km/h tracked 1,5 km/h oruga 1,5 km/h sur chenilles 1,5 km/h raups 1,5 km/h rupš 1,5 km/h гусеничное 1,5 km/h
	idraulici hydraulic hidráulico hydrauliques hydraulisch hydraulisch гидравлическое		Kg ↓		1980 kg
	2050 mm				